



2020 ACDHUM Range



ACDHUM - Energy Efficient 100% Outside Air Dehumidification.

Fresh outside air must be supplied to indoor spaces to meet minimum mandated building code legislation (or greater volumes if required to improve occupant comfort) and provide make up air or positive room pressurisation where ever needed. In humid climates introducing this outside air into an indoor space can cause issues if the high moisture level is not addressed. High indoor humidity can result in occupant discomfort, toxic mould growth and condensation forming on cooler surfaces which leads to the degradation of the building fabric and its contents. Climate change is causing increased humidity levels in cities that have historically been immune from this problem.

Conventional air conditioning systems are not the answer. They are typically designed to provide sensible cooling and therefore are controlled according to dry bulb temperature in the space and thus cycle off or reduce capacity when the room temperature reaches set point. As the ratio of latent to sensible heat load has been increasing the dehumidifying ability of these units is unsatisfactory causing humidity to rise within the indoor environment.


It is possible to run conventional air conditioning equipment constantly at a low enough temperature to provide the necessary dehumidification but unless the sensible load is sufficient this approach could result in over-cooling of the space and cause occupant discomfort.

Air Change ACDHUM units provide a highly efficient dehumidification solution by combining air-to-air heat exchange technology with DX or hydronic (CHW) cooling and sophisticated control systems. By using its expertise in control and refrigeration technology, Air Change Low Dew Point dehumidification units are able to produce particularly low supply air moisture contents down as low as 5g/kg dry air. With nominal airflows ranging from 500l/s to 6000l/s, and unit capacities designed around project specific requirements, there is an ACDHUM solution for any application. Contact your Air Change representative for a detailed unit selection.

Condensers can be roof, end or remote mounted.




How it Works

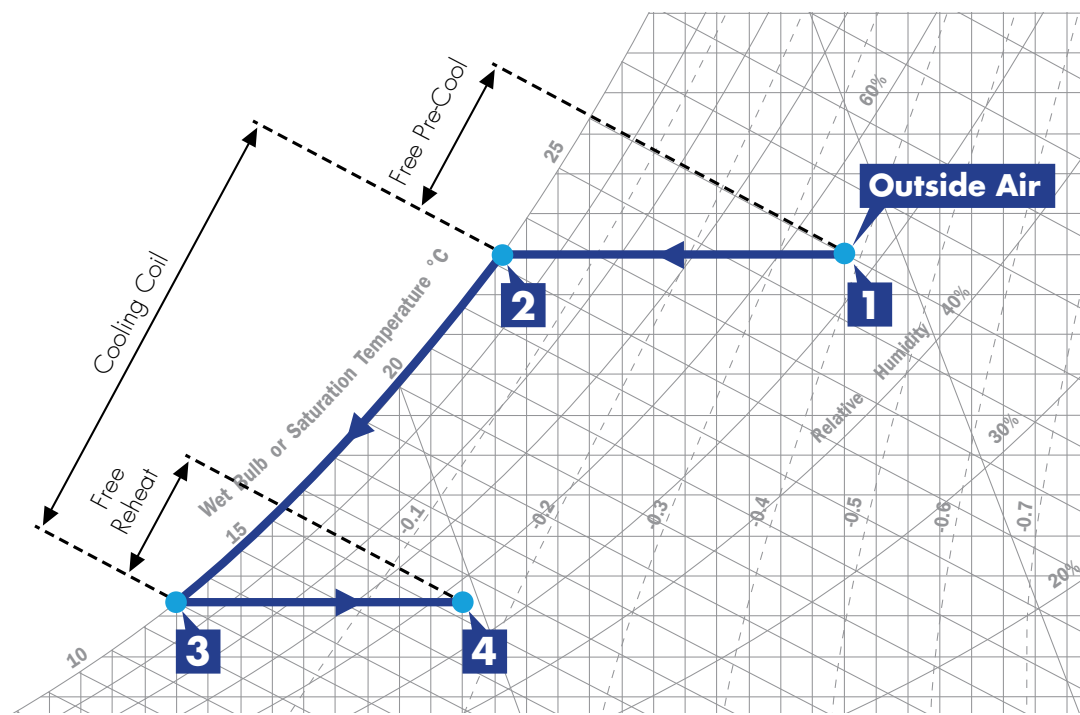


ACDHUM Stages of Operation

1. Fresh humid outside air enters the unit and is filtered through bag filters.
2. The humid outside air passes through one channel of the air-to-air heat exchanger where it is pre-cooled by the air leaving the cooling coil (stage 3).
3. The pre-cooled outside air is then further cooled through a DX or CHW coil to the required dew point temperature.
4. The cold dehumidified outside air passes through the other channel of the air-to-air heat exchanger where it is heated while simultaneously cooling the incoming air in the first channel.
5. By allowing a portion of dehumidified air to bypass the reheat stage, the supply air temperature can be trimmed and controlled.

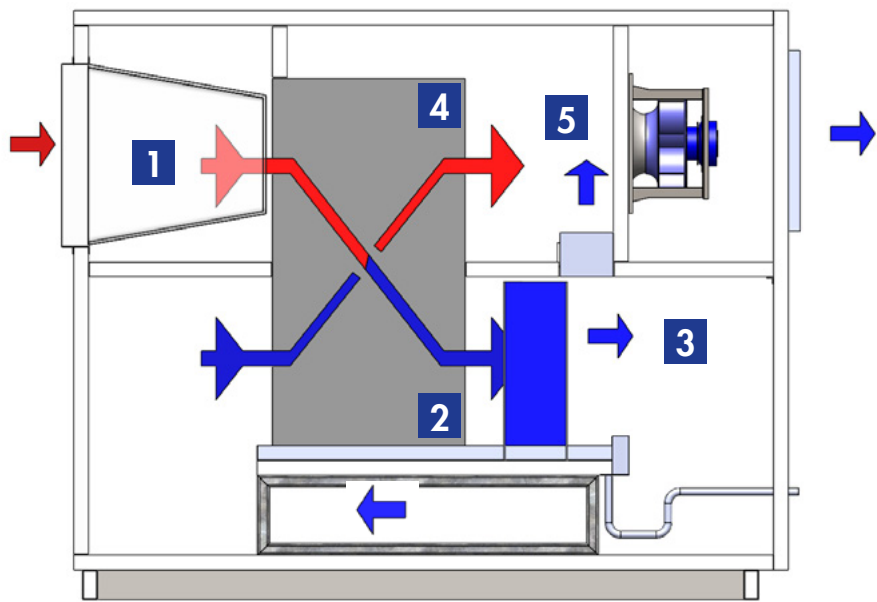


Precooling the outside air in the HEX reduces the DX or CHW load needed for dehumidification. The consequential temperature rise of the supply air in the second channel of the HEX prevents over cooling of the space.

The Advantages

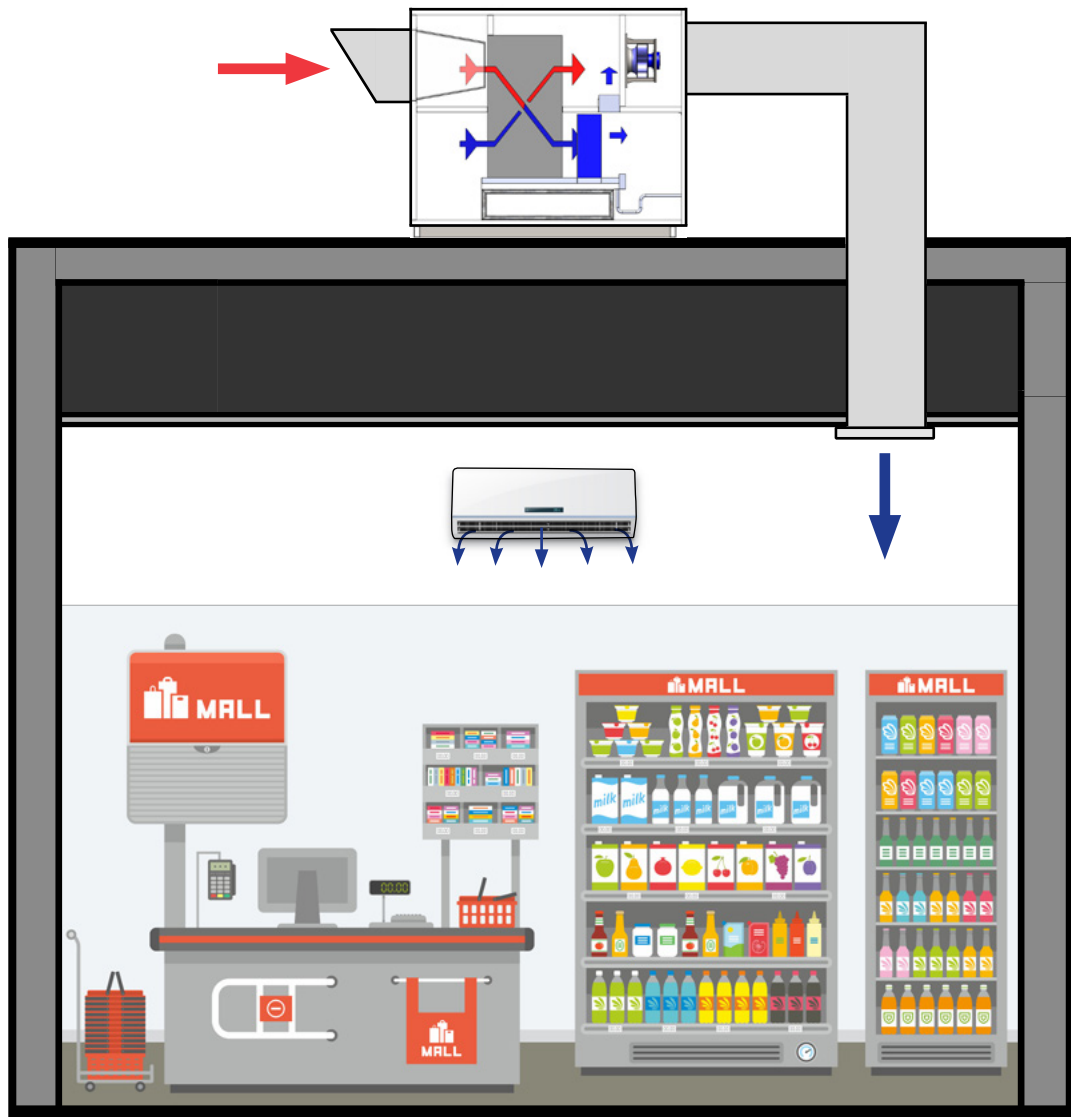

- Precooling from the air-to-air heat exchanger saves energy by reducing the DX or CHW mechanical cooling needed to achieve the required supply air dew point temperature.
- The air-to-air heat exchanger reheat ensures the space is not overcooled after dehumidification. Separate cooling equipment can then address the room sensible load as required.
- ACDHUM units can be used in series or parallel with conventional cooling equipment dedicated to addressing the room load.
- ACDHUM units can provide positive room pressurisation and help prevent infiltration of external humidity or contaminants.
- As desiccant dehumidification is not used, no hot regeneration air is required which simplifies installation.

Features

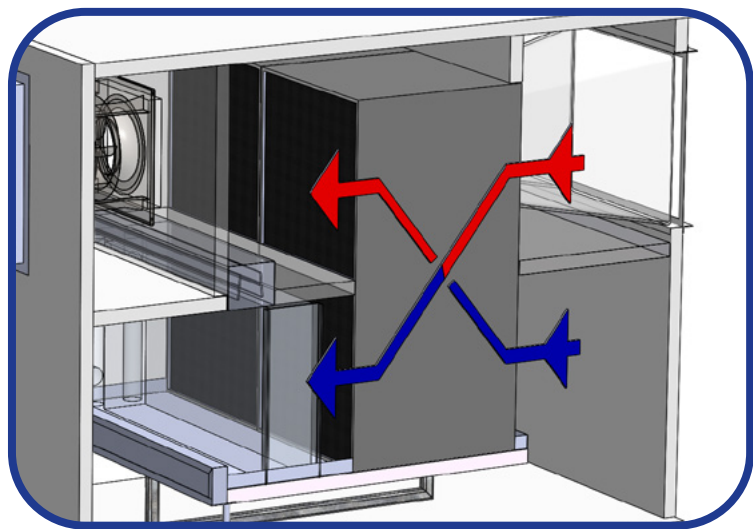

Air-to-Air Heat Exchangers

Air Change’s unique counterflow plate heat exchangers provide optimal heat transfer between airflow paths, which maximises the precooling and reheat effectiveness.

Features



EC Supply Air Fans

EC fans offer optimal levels of energy efficiency. They can also produce high static pressures, making them suitable for applications requiring high filtration grades or long ductwork runs.




BLDC Inverter Compressors

To best perform their required function, a dehumidifier must maintain a constant air-off coil dew point temperature which requires a stable evaporator pressure with any air-on coil condition. The variable capacity control of inverter compressors allow units to precisely meet the required dew point temperature without compressor on/off cycling and hence maintain constant and accurate dehumidification. Inverter compressors also offer much higher energy efficiency than fixed speed compressors using hot gas bypass to achieve stable evaporator pressure and better control and efficiency than digital scroll compressors.




EC Axial Condenser Fans

High efficiency EC axial fans are used for the condenser air. These are speed controlled by the integrated control system with respect to head pressure.

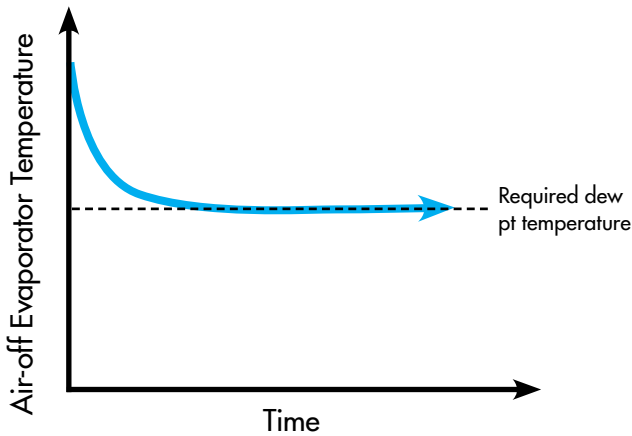

Smooth and steady control of evaporator air temperature achieved by inverter compressors.

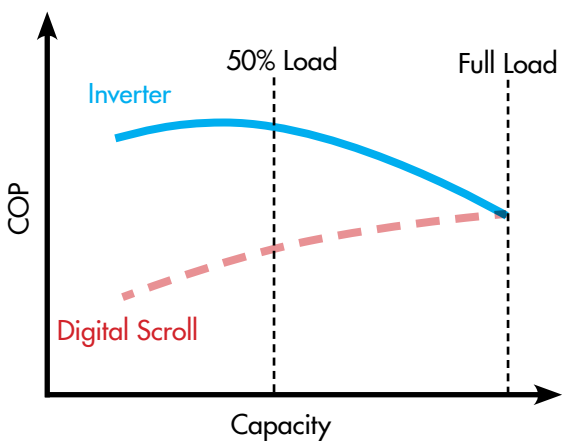

Indicative COP vs. capacity profiles of inverter and digital scroll compressors.




ClimaSync Control System

The included ClimaSync Control System ensures optimal performance and reliability. The control logic and operational functions are programmed to meet the requirements of each project. Features include proactive thermostat logic, performance status and trends, advanced protection logic, alarm histories, and time scheduling. Unit operation is achieved through touchscreen human machine interface, high level interface, or through online connectivity.

Technical Data - ACDHUM-W (CHW Systems)

Model Number:	ACDHUM1-W	ACDHUM2-W	ACDHUM3-W	ACDHUM4-W	ACDHUM5-W	ACDHUM6-W	ACDHUM7-W	ACDHUM8-W
Supply Air - Nominal (l/s)	500	1000	1400	2000	2800	3600	4300	5000
Supply Air - Max (l/s)	700	1400	2000	2800	3600	4300	5000	6000
Outside Air	100%							
Capacity (kW) Cooling	CHW Coil Sized to Project Requirements							
SA Moisture Content (g/kg dry air)	CHW Dependent							
Fan Type	3 Phase EC Plug Fans - Variable Speed							
Volts / Ph / Hz	415 / 3 / 50							
Construction	50mm PU Sandwich Panel							
Weight (kg)	550	850	1100	1400	1750	2000	2350	2800
Dimensions								
Body Depth (mm)	2580	2580	2410	2410	2410	2410	2410	2410
Body Width (mm)	850	1400	2050	2700	3350	4000	4650	5300
Overall Height (mm)	1910	1910	1910	1910	1960	1960	1960	1960


*Specifications are subject to change. Refer to project certified documentation for finalised details.

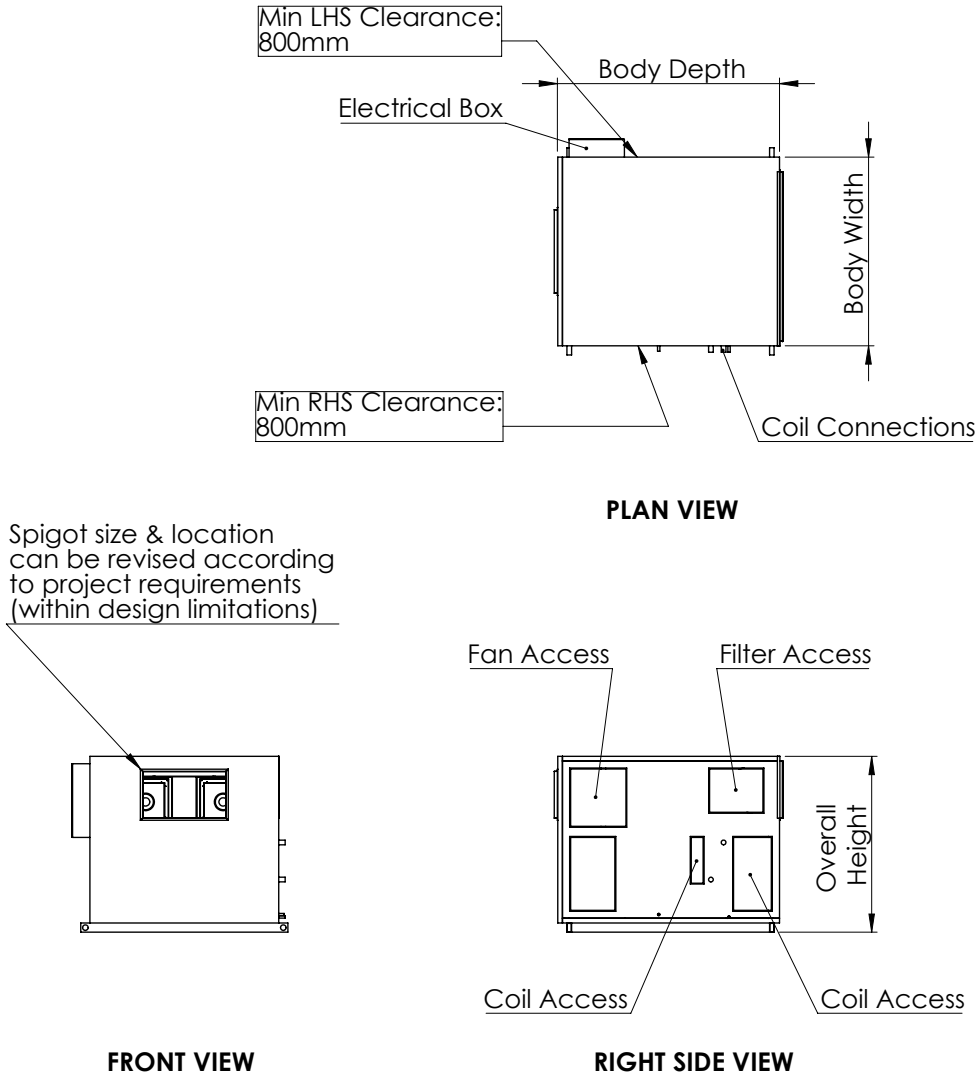

Technical Data - ACDHUM-D (DX Systems)

Model Number:	ACDHUM1-D	ACDHUM2-D	ACDHUM3-D	ACDHUM4-D	ACDHUM5-D	ACDHUM6-D	ACDHUM7-D
Supply Air - Nominal (l/s)	500	1000	1400	2000	2800	3600	4300
Supply Air - Max (l/s)	700	1400	2000	2800	3600	4300	5000
Outside Air	100%						
Capacity (kW) Cooling	Refrigeration Sized to Project Requirements						
SA Moisture Content (g/kg dry air)	>8g/kg dry air						
Compressor Type	BLDC Inverter						
Reverse Cycle	Available Upon Request						
Refrigerant	R410A						
Fan Type	3 Phase EC Plug Fans - Variable Speed						
Volts / Ph / Hz	415 / 3 / 50						
Construction	50mm PU Sandwich Panel						
Weight (kg)	850	1300	1550	2150	2700	3150	3600
Dimensions							
Body Depth (mm)	2260	2610	2410	2410	2410	2410	2410
Body Width (mm)	1760	2410	2700	3350	4650	4650	5300
Overall Height (mm)	2170	2246	3000	3000	3000	3000	3000

*Specifications are subject to change. Dimensions and weight are dependent on the required capacity and design conditions. Refer to project certified documentation for finalised details.

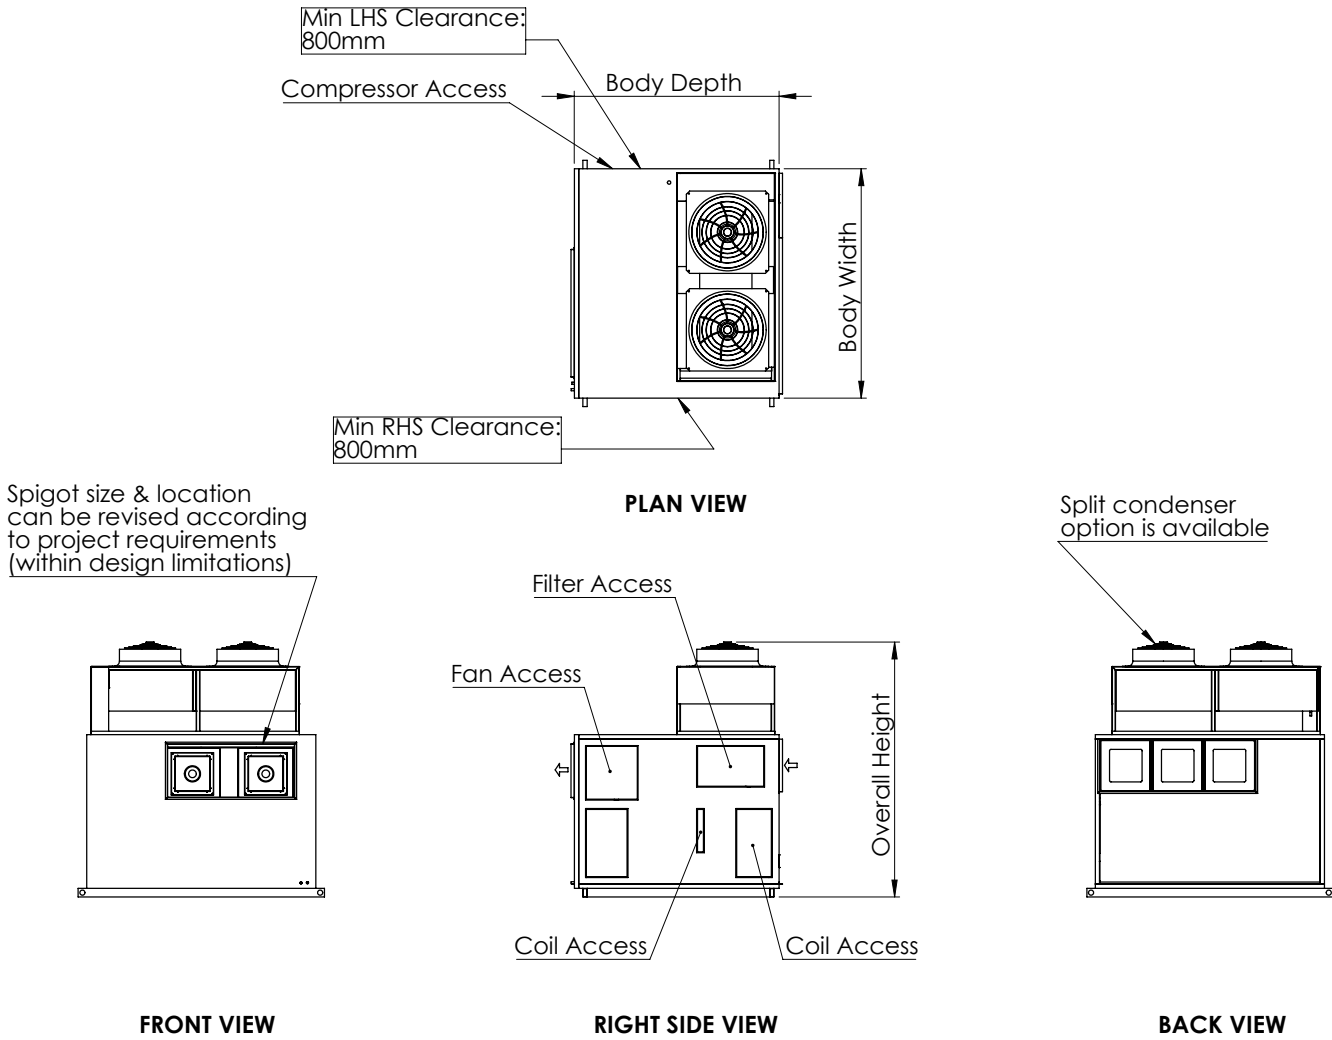


Technical Data - ACDHUM-LD (Low Dew Point)

Model Number:	ACDHUM1-LD	ACDHUM2-LD	ACDHUM3-LD	ACDHUM4-LD	ACDHUM5-LD
Supply Air - Nominal (l/s)	500	1000	1400	2000	2800
Supply Air - Max (l/s)	700	1400	2000	2800	3600
Outside Air	100%				
Capacity (kW) Cooling	Refrigeration Sized to Project Requirements. Hybrid DX & CHW Available				
SA Moisture Content (g/kg dry air)	>5g/kg dry air				
Compressor Type	BLDC Inverter				
Reverse Cycle	Available Upon Request				
Refrigerant	R410A				
Fan Type	3 Phase EC Plug Fans - Variable Speed				
Volts / Ph / Hz	415 / 3 / 50				
Construction	50mm PU Sandwich Panel				
Dimensions	Contact your Air Change Representative				

*Specifications are subject to change. Refer to project certified documentation for finalised details.

The ACDHUM-LD range has been specifically designed for supermarket freezer aisles and process air applications requiring dehumidification down to 5g/kg dry air.

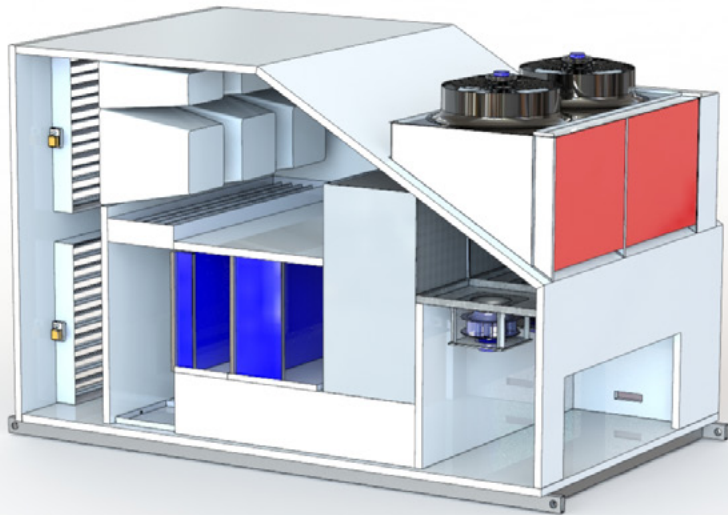

Winner of the 2018 ARBS Product Excellence Award, and the 2017 AIRAH Product of the Year Award.



Recent ACDHUM Projects



- Tesco Supermarkets, Thailand
 - KCE Electronics, Thailand
 - Jet Aviation, Seletar Airport, Singapore
 - 3M Tuas Factory, Singapore
 - Caltex Laboratory, QLD
 - Brisbane Airport, QLD
 - Townsville TAFE, QLD
 - Rockhampton Fire Station, QLD
- Stanwell Power Station, QLD
 - DuPont Danisco, NSW
 - Heritage House Darwin, NT
 - Rio Tinto Gove, NT
 - Coles Broome, NT
 - Horizon Power Port Headland, WA
 - Dampier Community Hub, WA
 - Wickham Community Hub, WA



Plus over 30 ALDI stores around QLD and northern NSW.

Contact Us

Air Change Australia

New South Wales (Head Office)

2 Ashford Ave, Milperra NSW 2241

Phone (02) 8774 1400

Email sales@airchange.com.au

Queensland

Unit 3, 78 Logan Rd,
Woolloongabba QLD 4102

Phone (07) 3891 1974

Email sales.qld@airchange.com.au

Victoria

Suite 3A, 529 Burwood Rd, Hawthorn VIC
3122

Phone (03) 9482 1010

Email sales.vic@airchange.com.au

Australian Distributors

South Australia & Northern Territory

Industrial Air

14 Princess St, Beverley SA 5009

Phone (08) 8354 0088

Email info@industrialair.com.au

Website www.industrialair.com.au

Western Australia

Industrial Air

Unit 17, 16 Sustainable Ave, Bibra Lake WA
6163

Phone (08) 9418 2448

Email paul@industrialair.com.au

Website www.industrialairwa.com.au

North Queensland

Capricorn Air Conditioning

13 Mackley St, Garbutt QLD 4814

Phone (07) 4775 5222

Email sam2@capaircon.com.au

Tasmania

Major Air - Launceston

76 York St, Launceston TAS 7250

Phone (03) 6344 6888

Website www.majorair.com.au

Major Air - Hobart

Unit 2, 10 Lampton Ave,
Derwent Park TAS 7009

Phone (03) 6273 6455

Website www.majorair.com.au

Air Change South East Asia

Malaysia

No 5, Jalan Mega 1/9,
Taman Perindustrian Nusa Cemerlang
79200 Nusajaya, Johor

Phone (+60) 7509 8230

New Zealand Distributors

Cooke Industries

31 Station Rd, Penrose, Auckland 1061

Phone +64 (0)9 579 2185

Email sales@cookeindustries.co.nz

Website www.cookeindustries.co.nz

South East Asian Distributors

Thailand

Synergine (Thailand) Co.Ltd

18/6 Sukhumvit 22

Sukhumvit Rd, Khlong Toey

Bangkok 10110

Phone (+66) 851487312

Email w.manprasit@synergine.com.hk

Indonesia

PT Smart Chiller Systems

CEO Suites, One Pacific Place Tower

15th Floor, Jl. Jen. Sudirman Kav. 52-53

12190 Jakarta

Email mp@smardt-indonesia.com

Phone (+62) 21 2550 2413

Singapore

Energy Supplies & Engineering (S) Pte Ltd

61 Bukit Batok Crescent, #03-07B Heng
Loong Building, Singapore 658078

Contact 1- Desmond Tan

Email desmond@esengrg.com

Phone (+65) 9736 9956

Contact 2- Andrew Nah

Email andrew@esengrg.com

Phone (+65) 9771 8186



For more than 20 years, Air Change has provided unique equipment and engineering solutions for local and international clients using our internationally patented heat and energy recovery technology. During that time, we have developed a comprehensive range of energy efficient products to deliver controlled indoor climate conditions satisfying the requirements of all project stakeholders: the developer, the design engineer, and the building's owner and occupants.

www.airchange.com.au

© Air Change Pty Ltd 2020

202007ACDHUM

Air Change Pty Ltd products internationally patent protected

Refrigerant Trading Authorisation No: AU23586



Multi Award Winning Technology

ARBS Industry Awards "Product Excellence" Winner 2018

AIRAH "Product of the Year" Winner 2017

AIRAH "Excellence in Innovation" Winner 2012 & 2013