



## **2021 ERV-IC Range**

In-Ceiling Energy Recovery Ventilators

# Introduction - Energy Recovery Ventilators


Fresh outside air must be supplied to indoor spaces to meet minimum mandated building code legislation (or greater volumes if required to improve occupant comfort) and provide make up air or positive room pressurisation where ever needed. However, providing fresh outside air to an indoor space comes with a significant energy penalty as any temperature differential between outside and inside increases the heating or cooling load required to condition this outside air to a space neutral temperature. The greater this differential, the greater the amount of energy required. Similarly, if the humidity present in the outside air exceeds that in the space it will need to be removed to maintain a space neutral condition. The removal of this excess humidity adds a latent component to the cooling load and further increases the energy required to maintain the desired room condition. The air conditioning necessary to provide outside air at a space neutral condition is known as the fresh air load ("FAL").

The most efficient way to remove this FAL is treat it separately to the normal sensible load that arises from the space use and the building fabric heat gain or loss by employing a dedicated outdoor air system ("DOAS"). An Energy Recovery Ventilator ("ERV") is a common form of DOAS which allows heat or energy to transfer between fresh outside air and air that is being exhausted outside in order to minimise the FAL.

Air Change have been manufacturing and supplying its in-ceiling DOAS ERV-IC Range for over 20 years to a vast array of projects across Australia. By using its unique air-to-air heat and energy recovery technology, the Air Change ERV range is able to significantly reduce the running costs of HVAC systems needing fresh outside air. With compact designs suitable for ceiling space installation and a wide product range available, there is an Air Change ERV-IC solution for any project.

Contact one of our experienced sales engineers for a detailed unit selection.

# How it Works

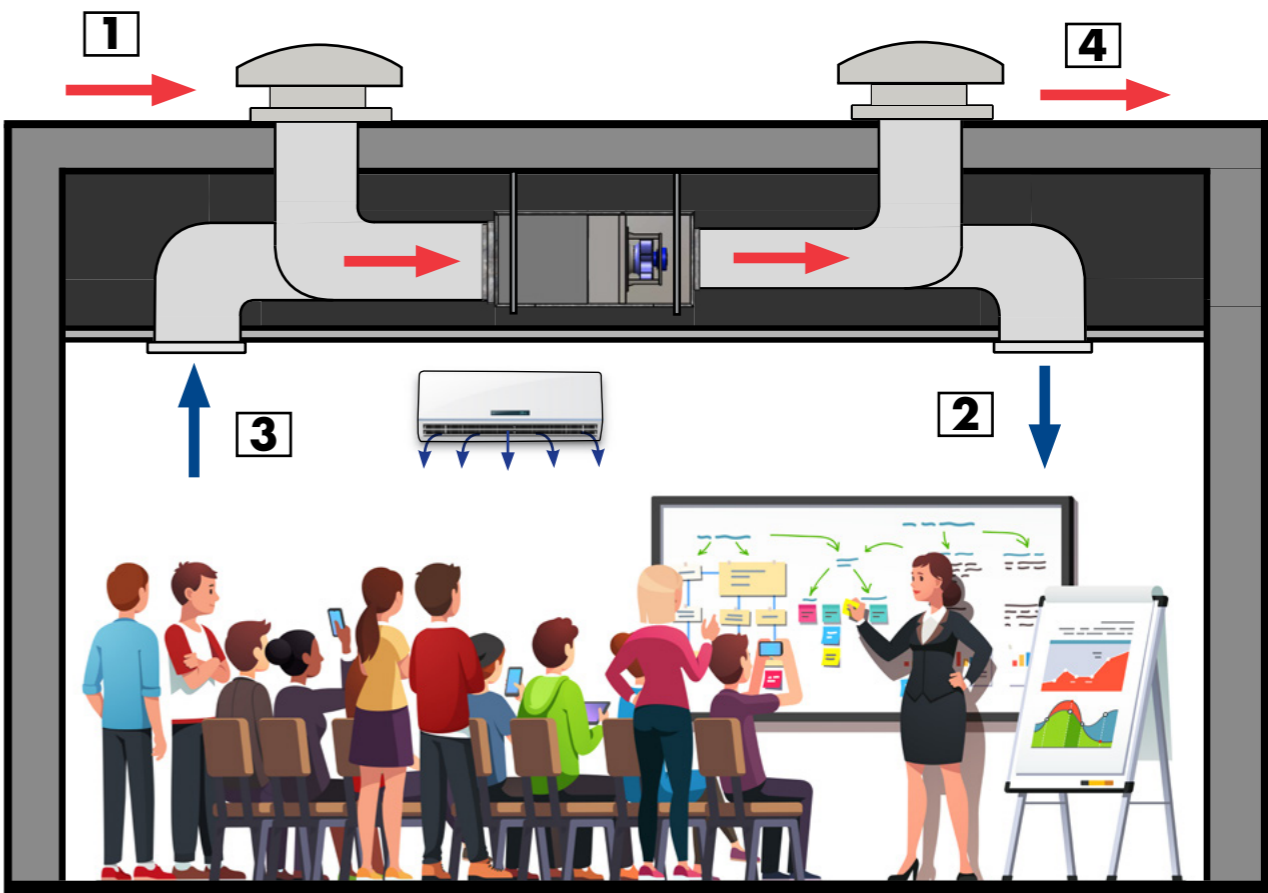


## Cooling Scenario


1. 100% fresh outside air enters the unit and passes through an air-to-air heat / energy exchanger where it exchanges heat (and moisture) with the return air (stage 3) that is to be exhausted.
2. Once the air has been pre-cooled (or dehumidified) passing through the air-to-air heat / energy exchanger it is supplied to the space. Additional cooling can be provided by separate equipment running in series or parallel to the ERV.
3. Cool dry air returns to the unit where it exchanges heat / energy with the hot fresh air before it is exhausted from the building.
4. The now hot (and humid) return air from the space is exhausted outside.

Conversely, in a heating scenario the air-to-air heat exchanger provides preheating to minimise the outside air load. Separate equipment can provide additional heating when required.

## Unit Plan View

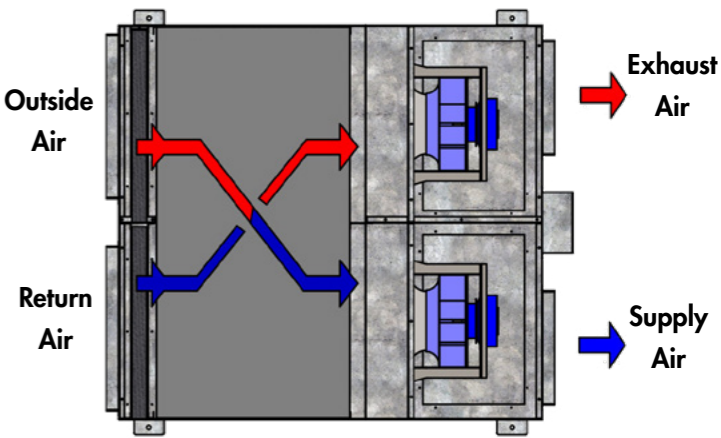


Airflow paths can be inverted i.e. outside air is swapped with return air, while exhaust air is swapped with supply air.

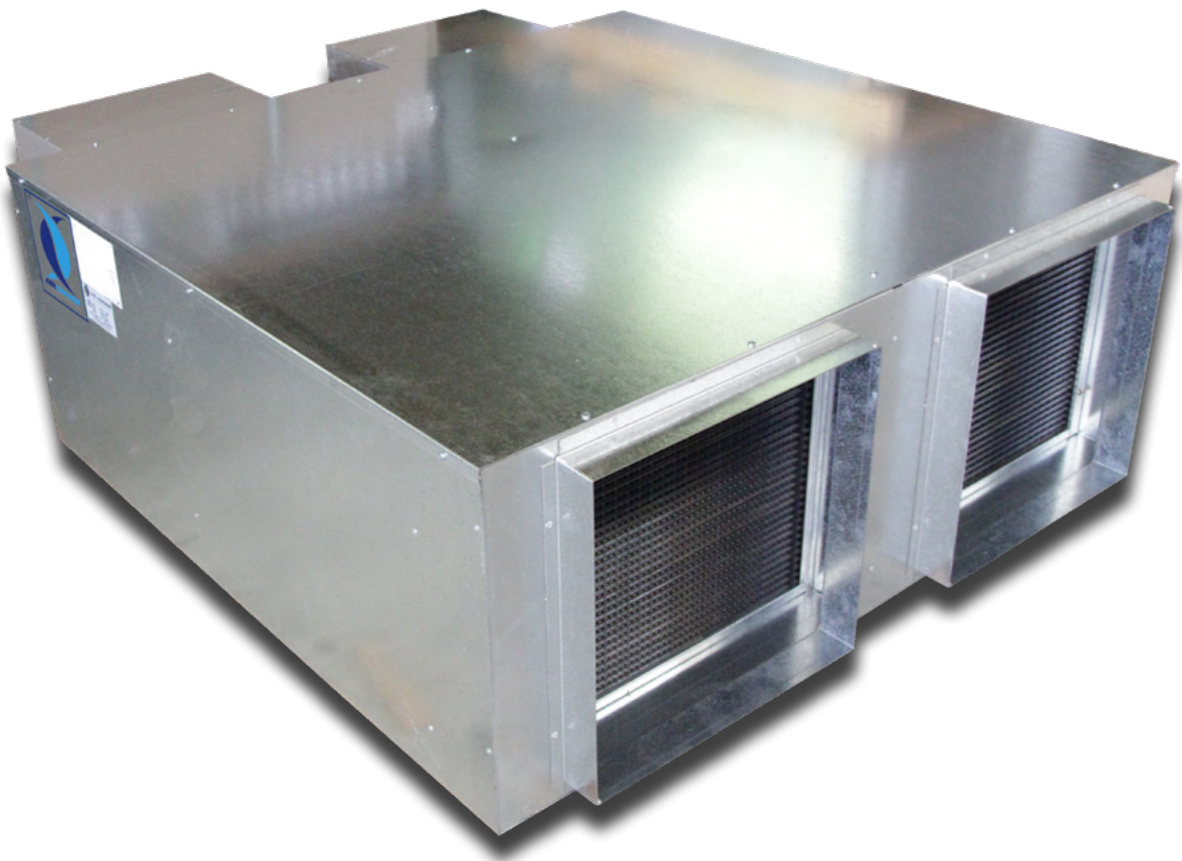


# The Advantages

The air-to-air heat / energy exchanger provides significant year-round energy savings by providing precooling in summer and preheating in winter.

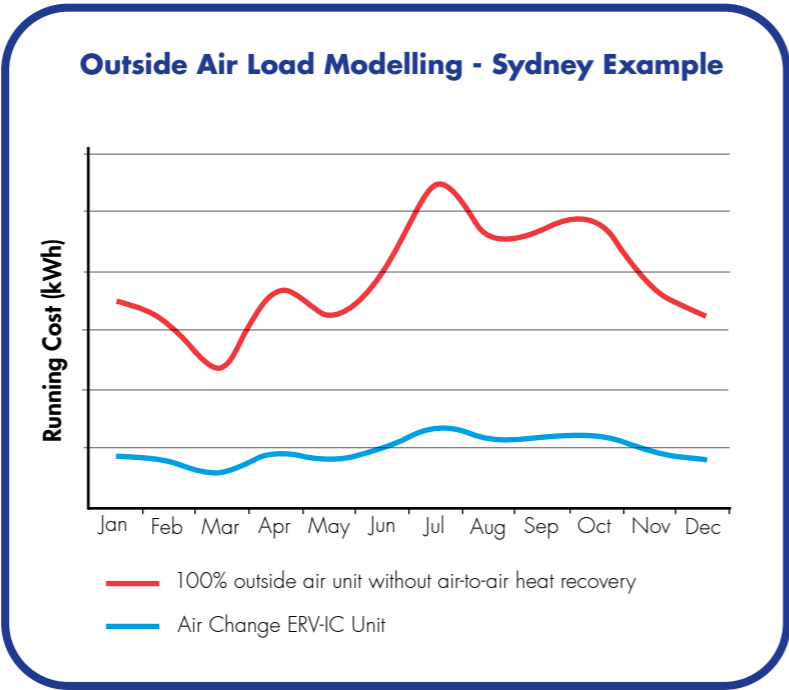


Two heat / energy exchanger transfer media options are available: the sensible-only type which allows only temperature to be exchanged (suitable for temperate climates), and the enthalpy type which allows humidity to be exchanged alongside temperature (suitable for tropical climates).

- Enthalpy type heat exchanger in humid climate
- Sensible-only type heat exchanger in temperate climate

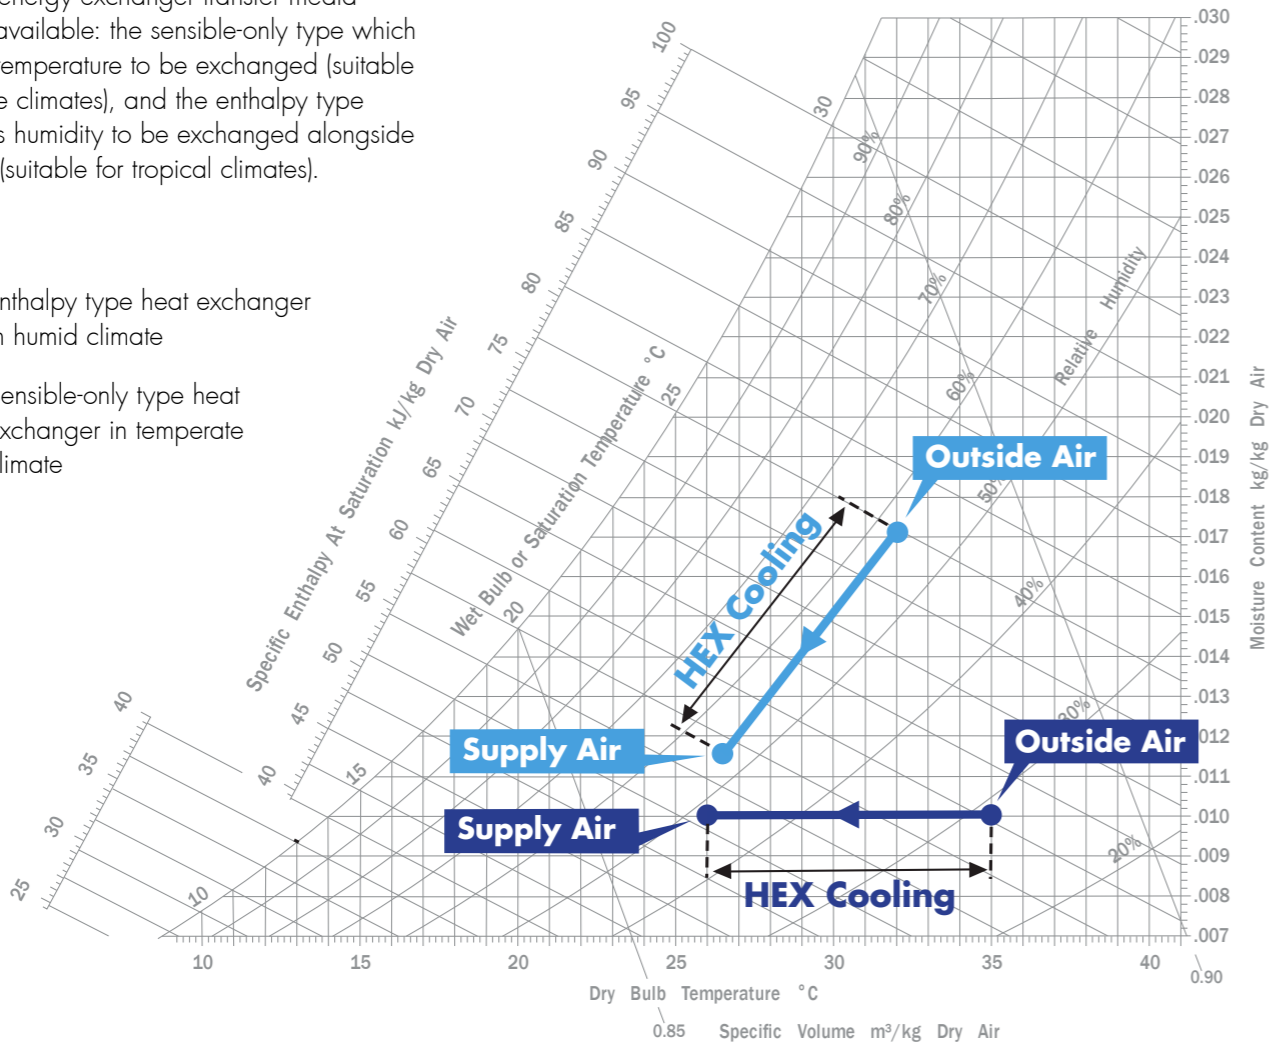


# Air Change ERV-IC Product Ranges

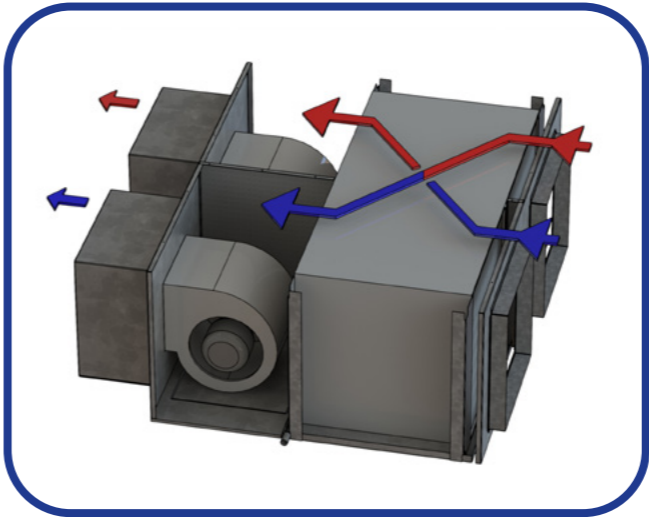

ERV-IC Units


The most basic in-ceiling ERV option. Forward curved centrifugal scroll fans are used for supply air and exhaust air.

Upgraded EC forward curved centrifugal scroll fans are available for greater efficiency and static pressure development.

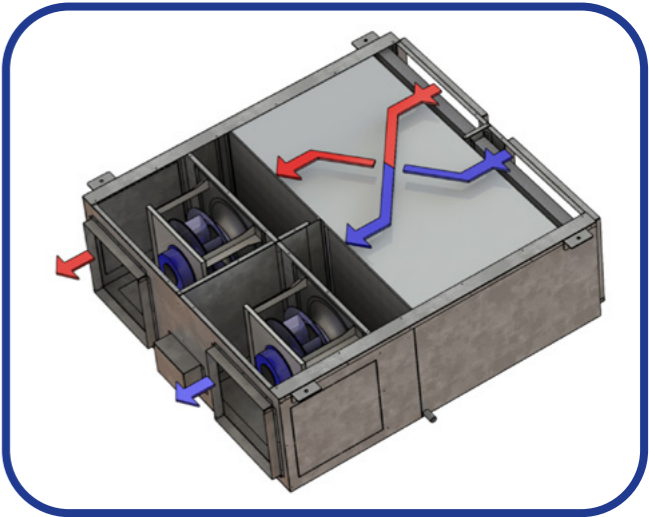

ERV-IC ECP Units


EC plug fans for supply air and exhaust air offer greater efficiency and static pressure development. G4 panel filters are also integrated into the unit. Supply and exhaust spigots can be relocated for side discharge and allow for greater installation flexibility.

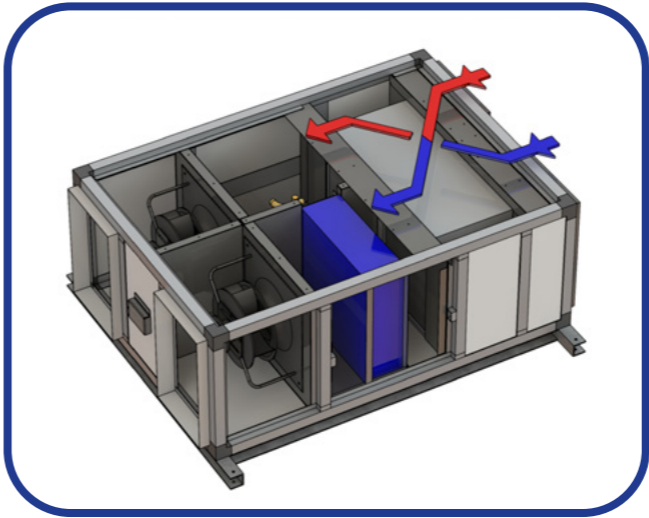

ERV-IC DX Units

Integrated DX coil and remote condensing unit for reverse cycle temperature control.

Contact your Air Change representative for more information.

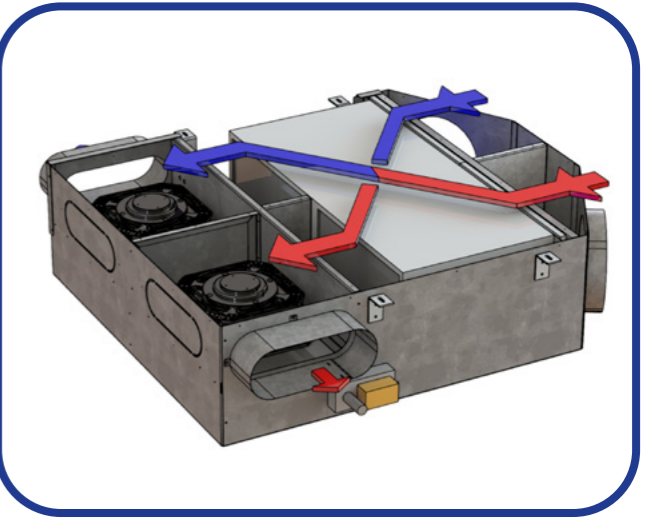

ERV-IC PC Units


Integrated pressure control system that allows the ERV unit to counteract positive or negative facade wind loads and maintain constant supply and exhaust airflow.

Contact your Air Change representative for more information.

# ERV-IC Scroll Fan Range

## (Model ERV-IC 70)

ERV-IC	
Model Number:	70
Nominal Supply Air (l/s)	70
Nominal Exhaust Air (l/s)	70
Outside Air	100%
HEX Media	Sensible-Only
Fan Type	EC Forward Curved Centrifugal Scroll
Static Pressure (Pa)	Refer to Fan Curve
Fan Motor Power (W)	25
Fan Speed Control	Potentiometer
Volts / Ph / Hz	240 / 1 / 50
Unit Full Load Amps (A)	1.2
Construction	Galvanised Sheetmetal with 12mm Film Faced PU Insulation
Filters	Panel Filter Included (side access next to electrical box)
Dimensions	
Body Length (mm)	715
Body Width (mm)	860
Overall Height (mm)	180
OA / RA Spigot Size (mm)	Ø150
SA / EA Spigot Size (mm)	Ø150
Weight (kg)	25

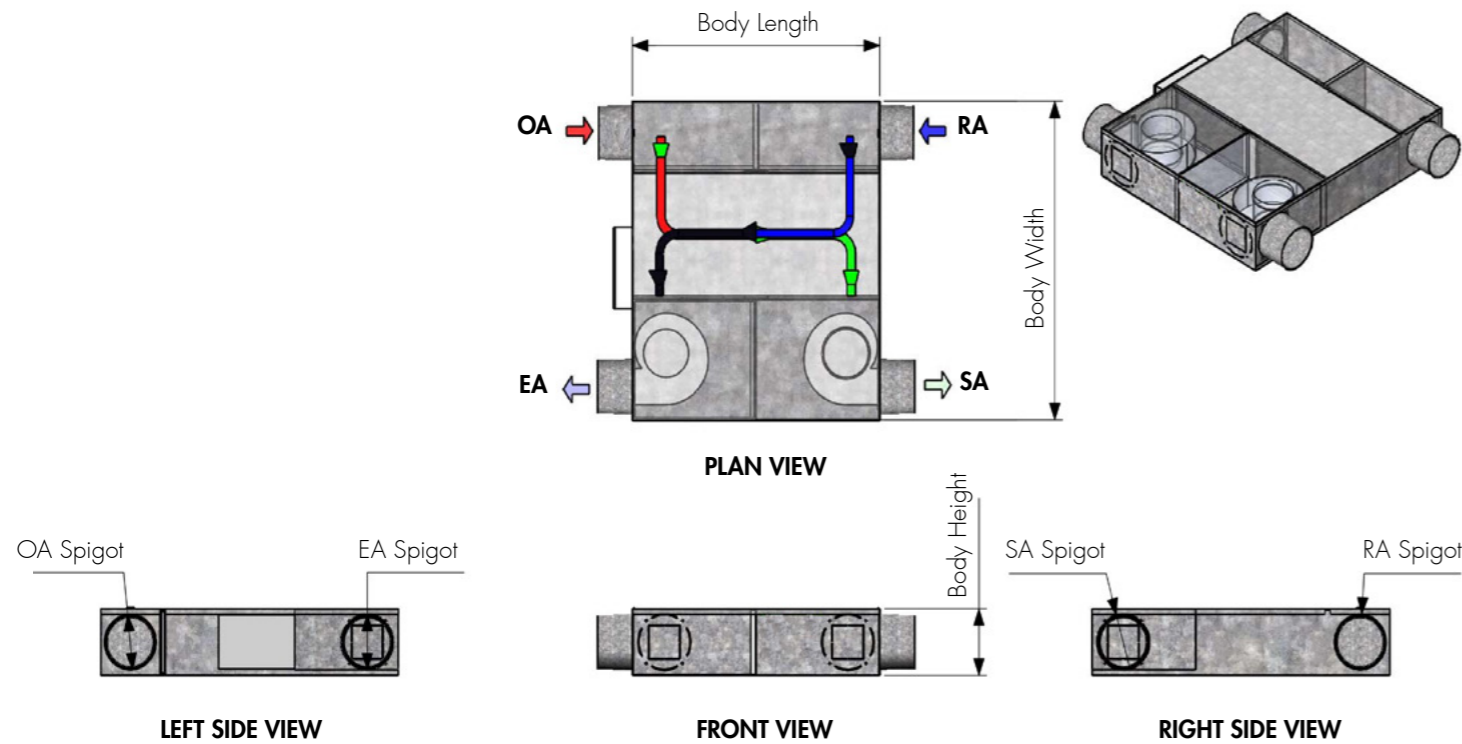


**Note:** The ERV-IC 70 has non-typical spigot locations compared to other Air Change ERV-IC units. Contact your Air Change representative for detailed dimensional drawings.

# ERV-IC Scroll Fan Range

## (Standard AC Scroll Fans)

ERV-IC					
Model Number:	200	300	400	600	900
Nominal Supply Air (l/s)	200	300	400	600	900
Nominal Exhaust Air (l/s)	200	300	400	600	900
Outside Air	100%				
HEX Media	Sensible-Only or Enthalpy				
Fan Type	AC Forward Curved Centrifugal Scroll				
Static Pressure (Pa)	Refer to Fan Curve				
Fan Motor Power (W)	100	130	240	950	950
Fan Speed Control	2 Speed	3 Speed	3 Speed	Potentiometer	Potentiometer
Volts / Ph / Hz	240 / 1 / 50				
Unit Full Load Amps (A)	2.7	2.7	3	10	10
Construction	Galvanised Sheetmetal with 12mm Film Faced PU Insulation				
Filters	Filter Boxes Supplied by Others				
Dimensions					
Body Length (mm)	950	950	950	1220	1220
Body Width (mm)	800	800	800	1300	1500
Overall Height (mm)	350	450	450	500	650
OA / RA Spigot Size (mm)	Ø250	Ø350	Ø350	450 x 450	500 x 500
SA / EA Spigot Size (mm)	Ø250	Ø350	Ø350	400 x 400	500 x 500
Weight (kg)	58	90	90	195	275

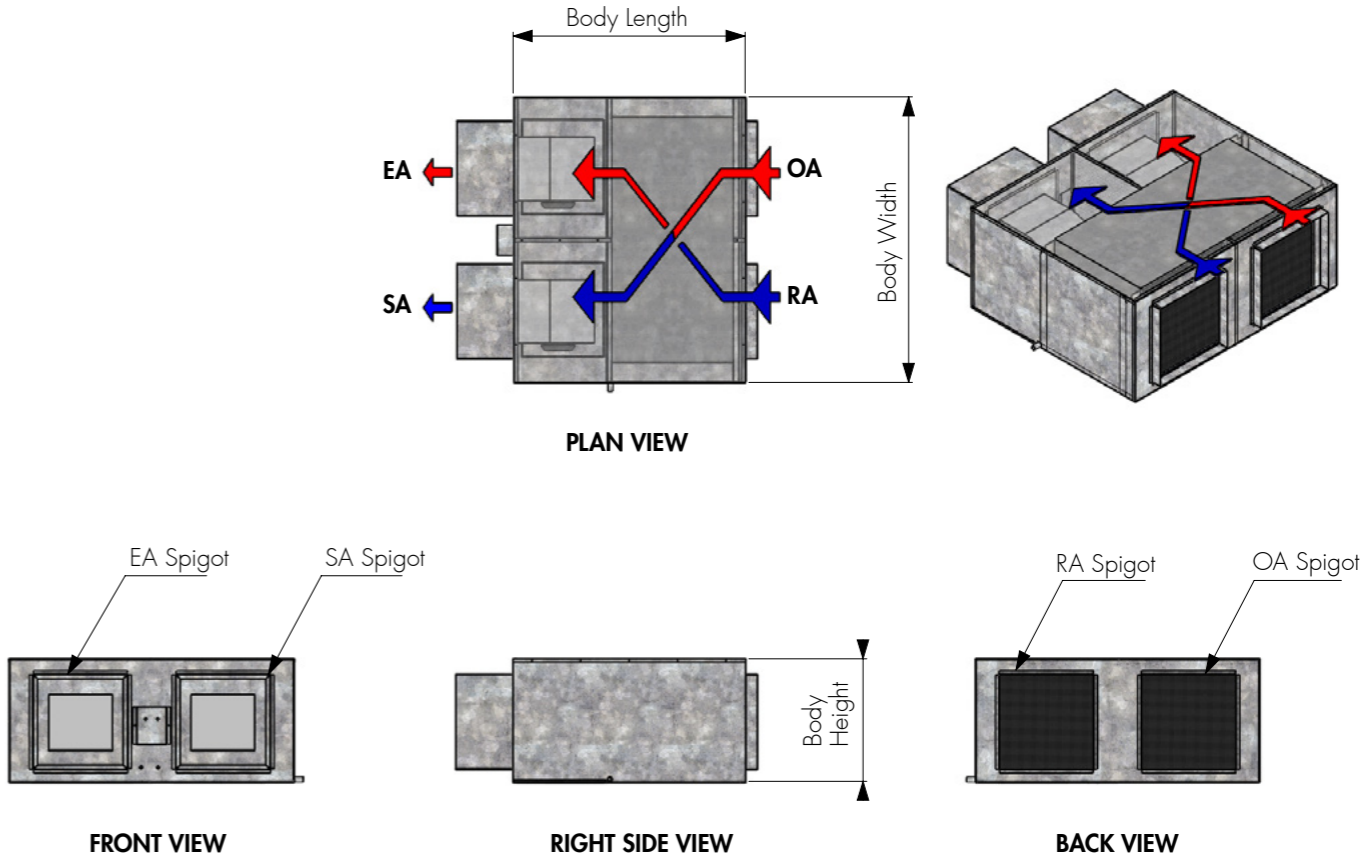


**Note:** Contact your Air Change representative for detailed dimensional drawings.

# ERV-IC Scroll Fan Range

## (EC Scroll Fan Upgrade)







ERV-IC					
Model Number:	200	300	400	600	900
Nominal Supply Air (l/s)	200	300	400	600	900
Nominal Exhaust Air (l/s)	200	300	400	600	900
Outside Air	100%				
HEX Media	Sensible-Only or Enthalpy				
Fan Type	EC Forward Curved Centrifugal Scroll				
Static Pressure (Pa)	Refer to Fan Curve				
Nominal Fan Motor Power*	1000	1000	1000	1000	1000
Fan Speed Control	Potentiometer				
Volts / Ph / Hz	240 / 1 / 50				
Unit Full Load Amps (A)	9	9	9	9	9
Construction	Galvanised Sheetmetal with 12mm Film Faced PU Insulation				
Filters	Filter Boxes Supplied by Others				
Dimensions					
Body Length (mm)	950	950	950	1220	1220
Body Width (mm)	800	800	800	1300	1500
Overall Height (mm)	350	450	450	500	650
OA / RA Spigot Size (mm)	Ø250	Ø350	Ø350	450 x 450	500 x 500
SA / EA Spigot Size (mm)	Ø250	Ø350	Ø350	400 x 400	500 x 500
Weight (kg)	58	90	90	195	275

\*Typical running power consumption is significantly less than nominal power.

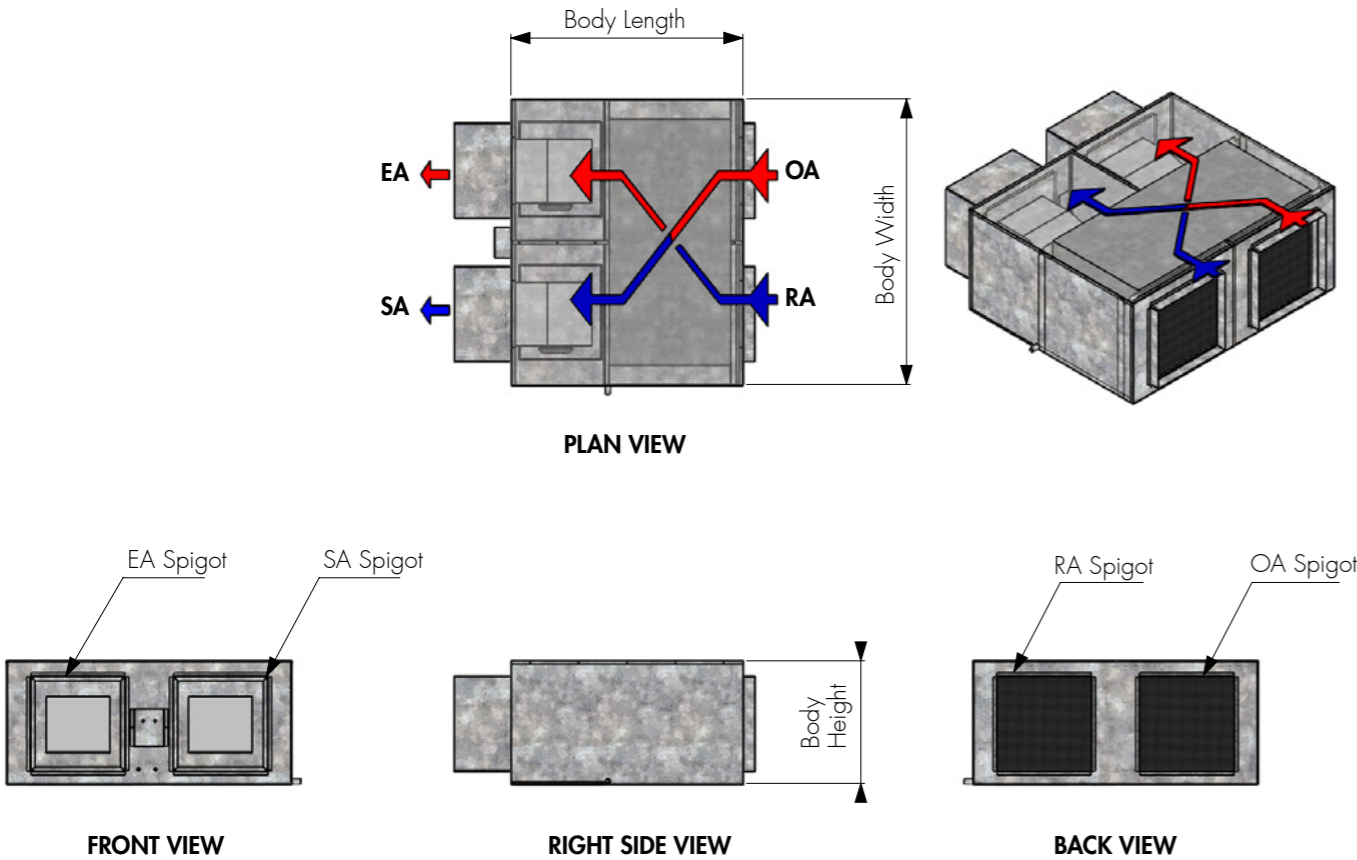

**Note:** Contact your Air Change representative for detailed dimensional drawings.


# ERV-IC Scroll Fan Performance

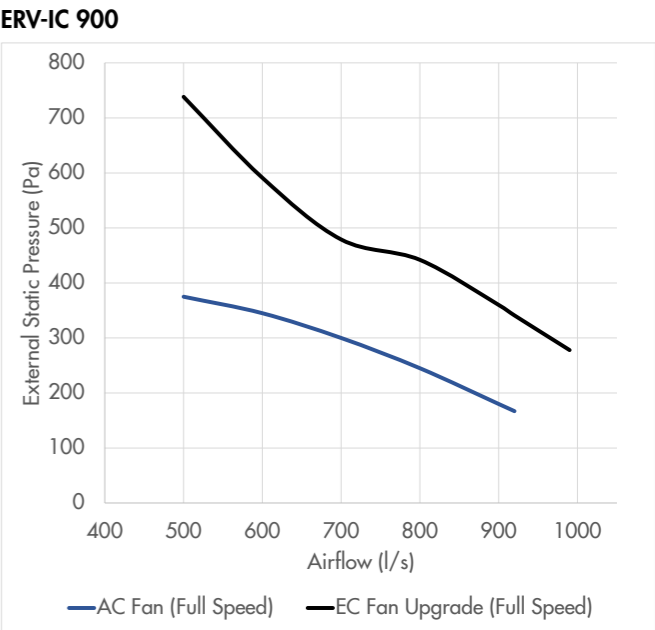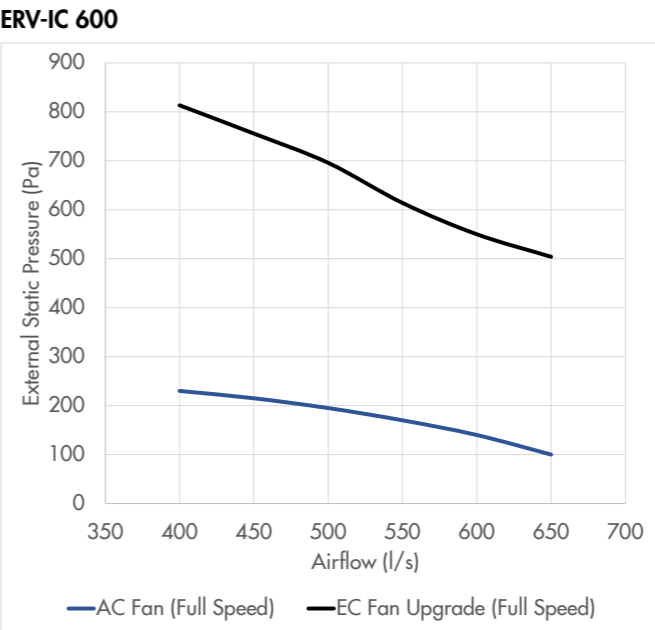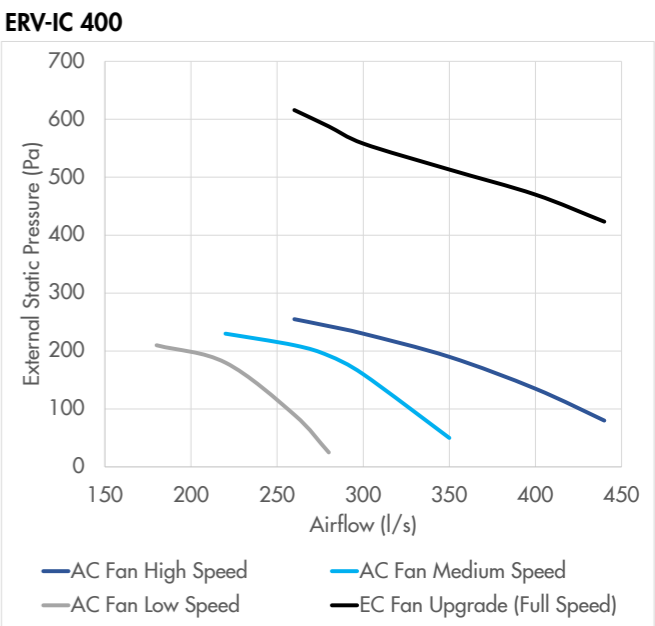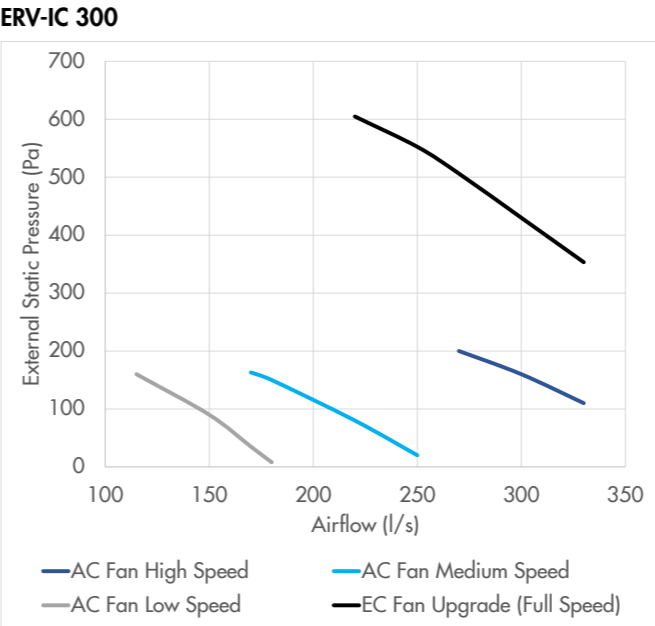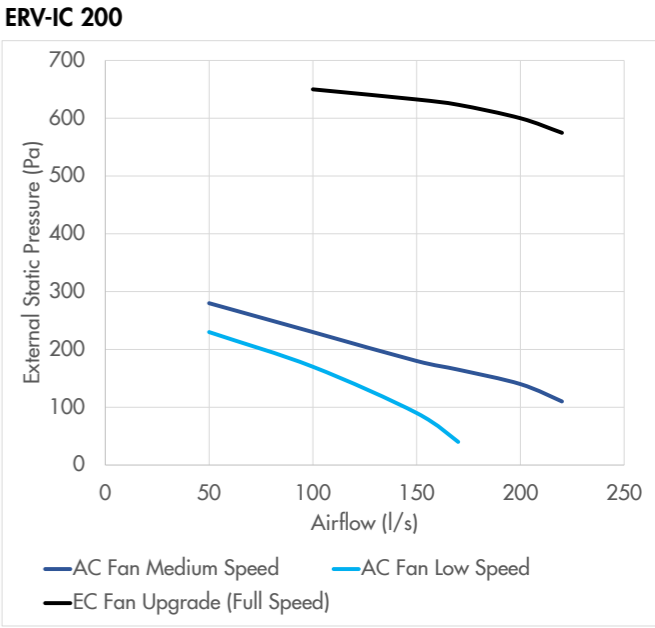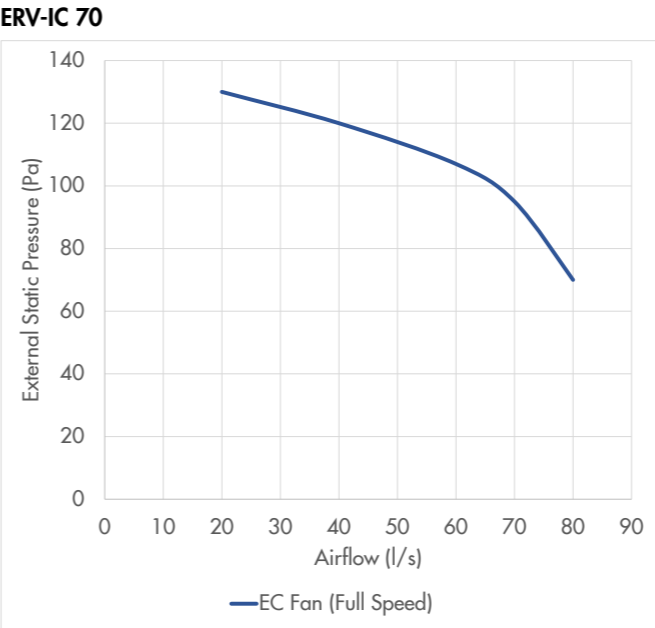


# ERV-IC EC Plug Fan Range

ERV-IC XXX-ECP					
Model Number:	200	400	600	900	1200
Nominal Supply Air (l/s)	200	400	600	900	1200
Nominal Exhaust Air (l/s)	200	400	600	900	1200
Outside Air	100%				
HEX Media	Sensible-Only or Enthalpy				
Fan Type	EC Plug				
Static Pressure (Pa)	Refer to Fan Curve				
Nominal Fan Motor Power* (kW)	0.169	0.75	2.5	2.5	2.5
Fan Speed Control	0-10V Signal (by Others)				
Volts / Ph / Hz	240 / 1 / 50		415 / 3 / 50		
Unit Full Load Amps (A)	2.7	6.6	7.4	7.4	7.4
Construction	Galvanised Sheetmetal with 12mm Film Faced PU Insulation				
Filters	Panel Filters Included (access from below)				
Dimensions					
Body Length (mm)	700	940	1400	1400	1450
Body Width (mm)	760	950	1300	1300	1350
Overall Height (mm)	350	450	500	650	850
OA / RA Spigot Size (mm)	245 x 245	395 x 395	540 x 440	540 x 590	500 x 700
SA / EA Spigot Size (mm)	295 x 295	295 x 295	375 x 375	375 x 500	500 x 600
Weight (kg)	80	110	220	300	400

\*Typical running power consumption is significantly less than nominal power. Contact your Air Change representative for fan modelling data.

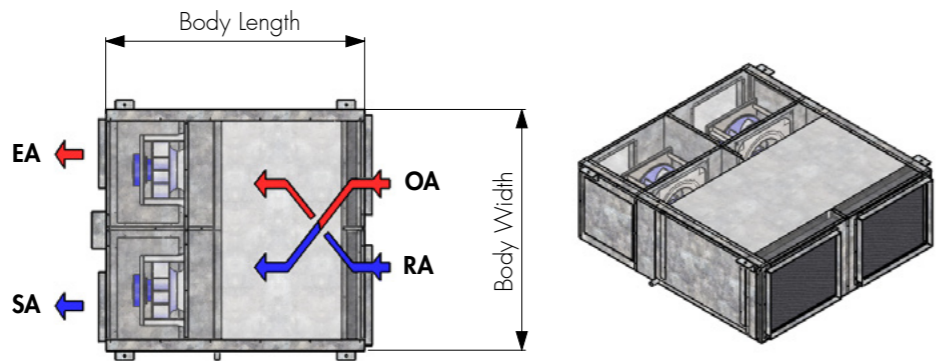


PLAN VIEW



FRONT VIEW



RIGHT SIDE VIEW




BACK VIEW


Note: Contact your Air Change representative for detailed dimensional drawings.

# ERV-IC EC Plug Fan Performance


ERV-IC 200-ECP

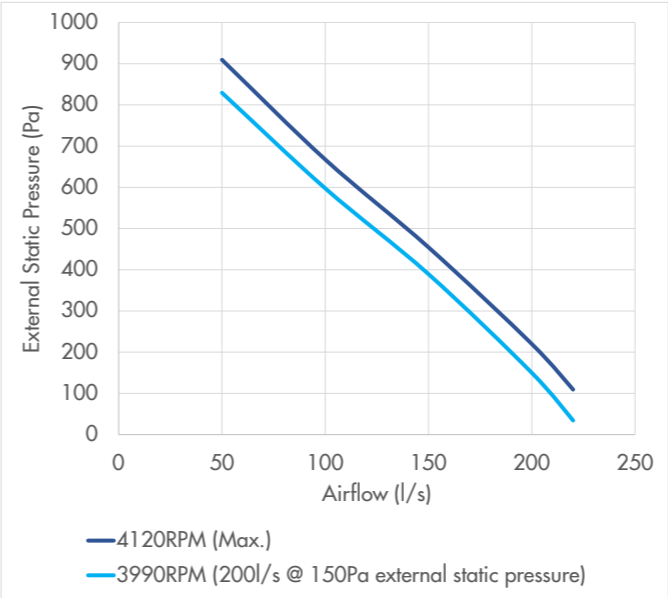


ERV-IC 400-ECP

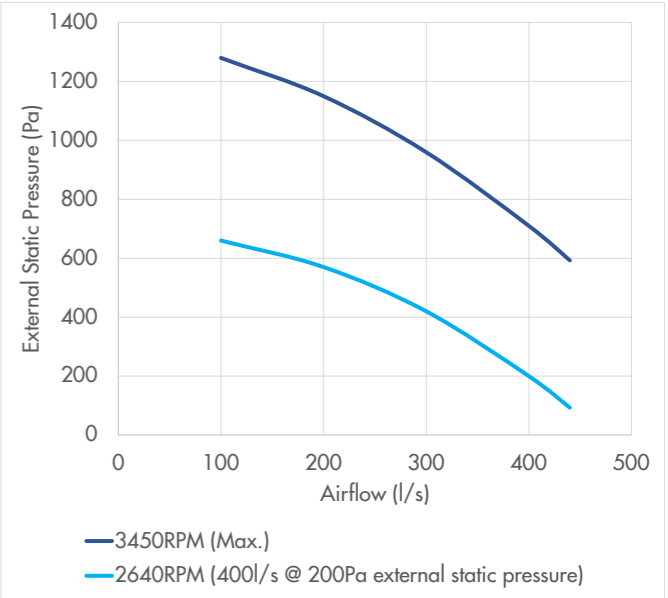


ERV-IC 600-ECP

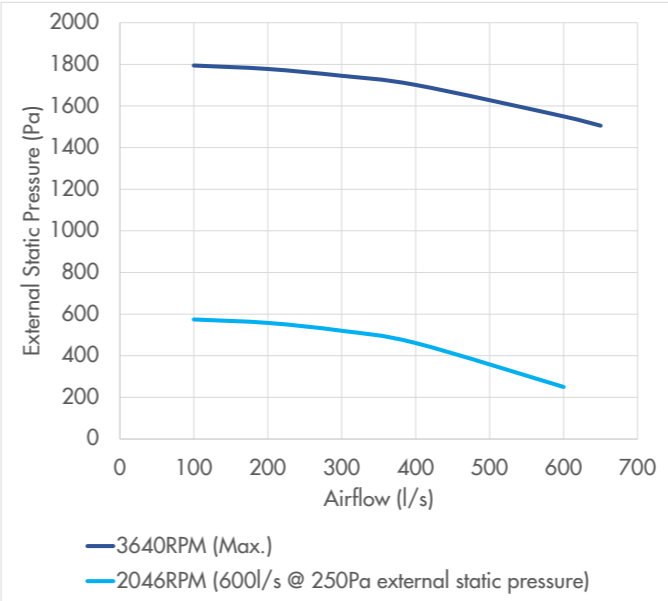

ERV-IC 900-ECP

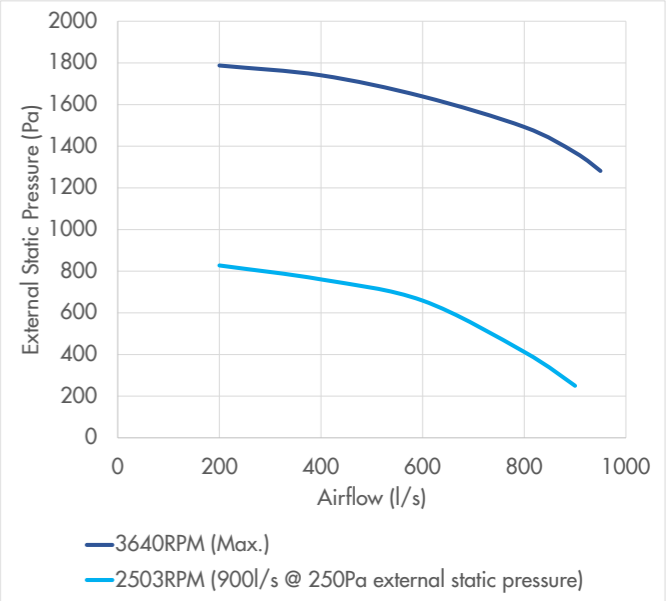

ERV-IC 1200-ECP

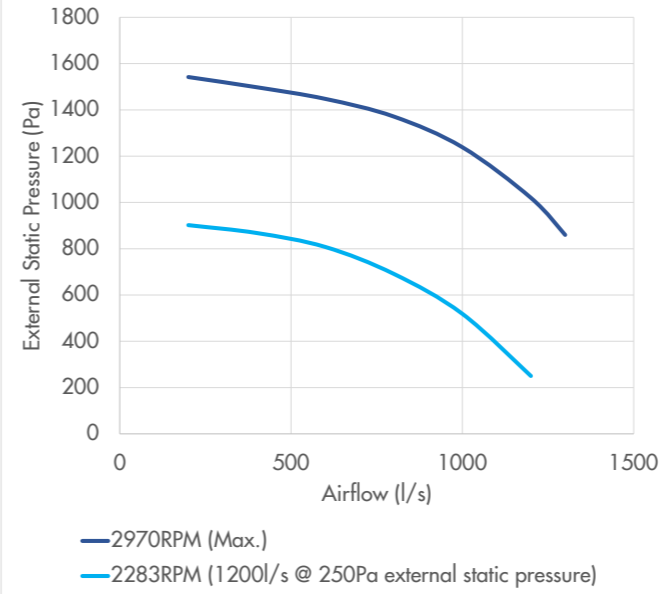

# Contact Us

## Air Change Australia

### New South Wales (Head Office)

2 Ashford Ave, Milperra NSW 2214

**Phone** (02) 8774 1400

**Email** sales@airchange.com.au

### Queensland

Unit 3, 78 Logan Rd,  
Woolloongabba QLD 4102

**Phone** (07) 3891 1974

**Email** sales.qld@airchange.com.au

### Victoria

Suite 3A, 529 Burwood Rd, Hawthorn VIC  
3122

**Phone** (03) 9482 1010

**Email** sales.vic@airchange.com.au

## Australian Distributors

### South Australia & Northern Territory

#### Industrial Air

14 Princess St, Beverley SA 5009

**Phone** (08) 8354 0088

**Email** info@industrialair.com.au

**Website** www.industrialair.com.au

### Western Australia

#### Industrial Air

Unit 17, 16 Sustainable Ave, Bibra Lake WA  
6163

**Phone** (08) 9418 2448

**Email** paul@industrialair.com.au

**Website** www.industrialairwa.com.au

### North Queensland

#### Capricorn Air Conditioning

13 Mackley St, Garbutt QLD 4814

**Phone** (07) 4775 5222

**Email** sam2@capaircon.com.au

### Tasmania

#### Major Air - Launceston

76 York St, Launceston TAS 7250

**Phone** (03) 6344 6888

**Website** www.majorair.com.au

#### Major Air - Hobart

Unit 2, 10 Lampton Ave,  
Derwent Park TAS 7009

**Phone** (03) 6273 6455

**Website** www.majorair.com.au

## Air Change South East Asia

### Malaysia

No 61, Jalan i-Park 1/1  
Perindustrian i-Park 81000 Bandar  
Indahpura, Johor

**Phone** (+60) 7662 6299

## New Zealand Distributors

### Cooke Industries

31 Station Rd, Penrose, Auckland 1061

**Phone** +64 (0)9 579 2185

**Email** sales@cookeindustries.co.nz

**Website** www.cookeindustries.co.nz

## South East Asian Distributors

### Thailand

#### Synergine (Thailand) Co.Ltd

18/6 Sukhumvit 22  
Sukhumvit Rd, Khlong Toey  
Bangkok 10110

**Phone** (+66) 851487312

**Email** w.manprasit@synergine.com.hk

### Indonesia

#### PT Smart Chiller Systems

CEO Suites, One Pacific Place Tower  
15th Floor, Jl. Jen. Sudirman Kav. 52-53  
12190 Jakarta

**Email** mp@smartd-indonesia.com

**Phone** (+62) 21 2550 2413

### Singapore

#### Energy Supplies & Engineering (S) Pte Ltd

61 Bukit Batok Crescent, #03-07B Heng  
Loong Building, Singapore 658078

**Contact 1-** Desmond Tan

**Email** desmond@esengrg.com

**Phone** (+65) 9736 9956

**Contact 2-** Andrew Nah

**Email** andrew@esengrg.com

**Phone** (+65) 9771 8186



For more than 20 years, Air Change has provided unique equipment and engineering solutions for local and international clients using our internationally patented heat and energy recovery technology. During that time, we have developed a comprehensive range of energy efficient products to deliver controlled indoor climate conditions satisfying the requirements of all project stakeholders: the developer, the design engineer, and the building's owner and occupants.

[www.airchange.com.au](http://www.airchange.com.au)

© Air Change Australia Pty Ltd 2021  
202012ERVIC

Air Change Pty Ltd products internationally patent protected

Refrigerant Trading Authorisation No: AU23586



### Multi Award Winning Technology

ARBS Industry Awards "Product Excellence" Winner 2018

AIRAH "Product of the Year" Winner 2017

AIRAH "Excellence in Innovation" Winner 2012 & 2013