

Big Box Air Conditioners for Large Indoor Spaces



# Introduction

Big open indoor spaces that require temperature control like warehouses, shopping malls and supermarkets present unique and demanding HVAC challenges.

Buildings of this scale generate huge heating and cooling loads and their large single zones require high airflow volumes to ensure adequate distribution of the treated air to all parts of the building.

While chilled and hot water AHU systems are capable of meeting these demands, they are unnecessarily complex for this application requiring a large array of equipment including boilers, chillers, pumps, pipework etc.

Large evaporative cooling systems are another potential solution in the right climatic environment. In the wrong application, they provide lower control over room temperature and can raise indoor humidity to an uncomfortable and unacceptable level.

Air Change has developed its RTU range of rooftop packaged units to provide simple and reliable temperature control for big open indoor spaces.

These large capacity "Big Box" units are available in standard sizes up to 230kW cooling capacity and can be customised to increase this capacity if required.


The units can be mounted anywhere but in most applications they will simply be mounted onto the roof to supply air directly into the indoor space for a fully integrated heating and cooling solution. An integrated economy cycle will deliver free cooling when ambient conditions permit.

Using Air Change's extensive experience with BLDC inverter compressors, the RTU delivers highly reliable, precise and efficient temperature control.

Contact your Air Change representative for a "Big Box" unit selection!




# How it Works

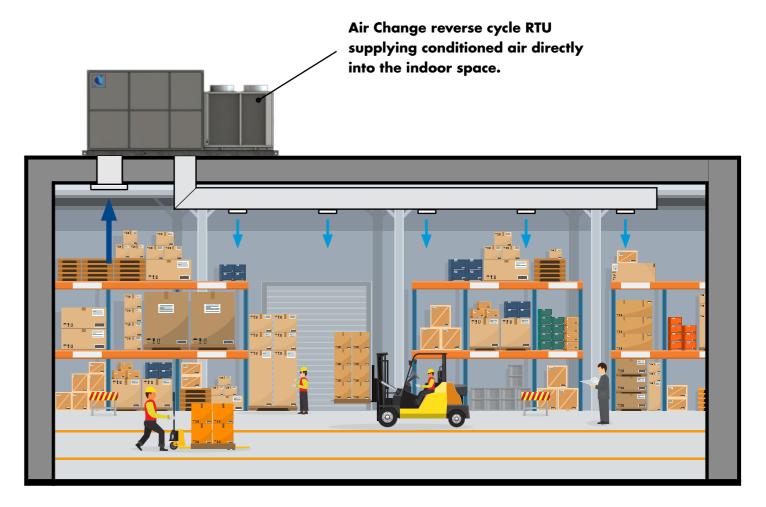

"Big Box" AC units are the simplest and most reliable temperature control solution for big open indoor spaces.

# **Flexible Airflow Configurations:**

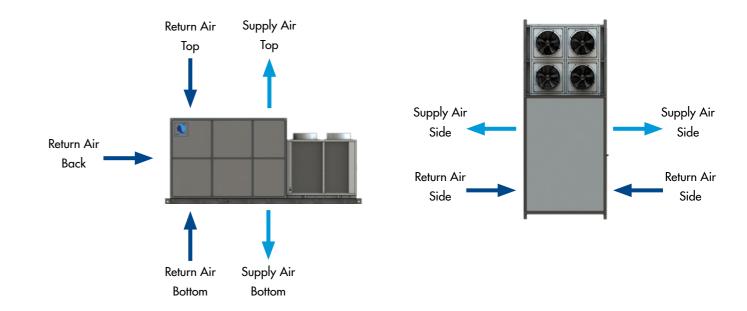

# Features




# **BLDC Inverter Compressors**

The units are designed with two refrigeration circuits, one with fixed speed compressors and one with BLDC inverter compressors to provide a wide variable load capacity.


This variable capacity control offered by the inverter compressors allow the unit's cooling or heating output to precisely match the required heat load and avoid the start stop cycles associated with fixed speed compressors.

Inverter compressors offer enhanced energy efficiency when operating at part-load due to the reduced compressor "lift". As DX systems typically spend minimal time at full design load, this translates to significant seasonal energy savings.

Air Change have been using BLDC inverter compressors for over 5 years with high reliability and are now incorporated in approximately 80% of all DX units manufactured by the Air Change Group.



Smooth and steady control of room temperature achieved by inverter compressors.



Indicative COP vs. capacity profiles of inverter and digital scroll compressors.

# EC Supply and Condenser Fans

EC supply fans permit variable capacity airflow to the space when required offering optimal energy efficiency.

Variable capacity condenser fans provide head pressure control and increase the efficiency of the refrigeration circuit.





# Features





# Double skin PIR Panel & Pentapost Construction

The units are manufactured with a 50mm PIR panel & thermally broken pentapost construction which provides:

- Low thermal conductivity.
- Neat inspection door access.
- Panel removal capability if required for large access openings.
- Design flexibility.

# **Integrated Bag Filters (Optional)**

Bag filters can be incorporated inside the unit if required.



# Features



# **Integrated Control System**

As standard, a supervisory control system is included to ensure safe and proper operation of the unit. BMS communication is achieved via low level control signals or BAC net

Optional upgrade to the Air Change ClimaSync Control System is available. This controls package is programmed to manage all functions of the unit and to meet the requirements of any project.



# **Economy Cycle Dampers**

Dampers can be integrated into the unit for the control of the required outside air and to provide free cooling for an Economy Cycle Mode when ambient conditions are suitable.

Internal return air relief dampers are available if required.

# **High Efficiency**

A lot of confusing efficiency acronyms get thrown around these days - COP, IEER, SEER etc.

The NCC 2019 section J5.11(b) calls for a minimum EER of 2.9 for air-cooled packaged air-conditioning equipment, and Air Change RTUs are designed to exceed this.




# Technical Data

	RTU			
Model Number:	110	140	170	200
Capacity				
Max Cooling (kW)	110	140	170	200
Min Cooling (kW)	20	20	25	30
Max Heating (kW)	125	155	185	210
Airflow				
Max (I/s)	6500	9000	10500	11500
Min (l/s)	2500	3000	3000	3000
Power				
Power Supply (V/Ph/Hz)	415/3/50	415/3/50	415/3/50	415/3/50
Compressors				
Compressor Type	1x Inverter + 1x Fixed	2x Inverter + 1x Fixed	2x Inverter + 1x Fixed	2x Inverter + 1x Fixed
Refrigerant	R410A	R410A	R410A	R410A
Fans				
Indoor Type	EC Plug	EC Plug	EC Plug	EC Plug
Outdoor Type	EC Axial	EC Axial	EC Axial	EC Axial
Overall Dimensions				
Length (mm)	5200	5300	5300	5300
Width (mm)	2400	2400	2400	2400
Height (mm)	1800	2600	2750	2750
Approx. Weight (kg)	2600	2750	2900	2950

Notes

-Specifications are subject to change. Refer to project certified documentation for finalised details.

-Cooling capacity based on: OA 35/24°C, RA 27/19°C. Heating capacity based on: OA 7°C, RA 20°C.

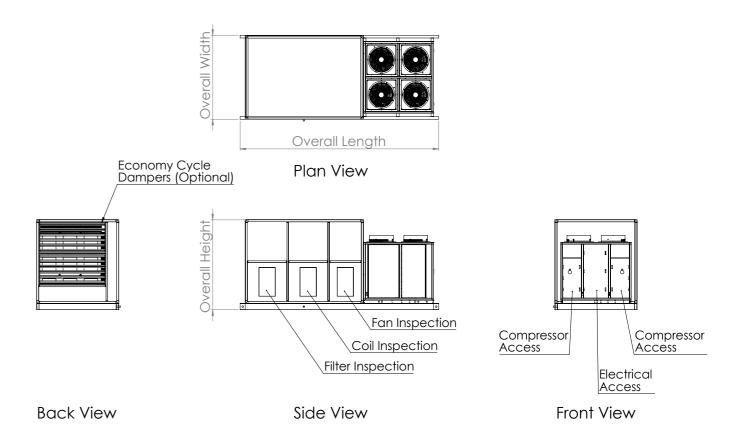

2021 | RTU Range | 2021 RTU Range | 2021

# Contact Us

# **Air Change Australia**

# **New South Wales (Head Office)**

2 Ashford Ave, Milperra NSW 2214 **Phone** (02) 8774 1400 **Email** sales@airchange.com.au

### Queensland

Unit 3, 78 Logan Rd, Woolloongabba QLD 4102 **Phone** (07) 3891 1974 **Email** sales.qld@airchange.com.au

### Victoria

Suite 3A, 529 Burwood Rd, Hawthorn VIC 3122

Phone (03) 9482 1010 Email sales.vic@airchange.com.au

# **Australian Distributors**

### **South Australia & Northern Territory**

### **Industrial Air**

14 Princess St, Beverley SA 5009

Phone (08) 8354 0088

Email info@industrialair.com.au

Website www.industrialair.com.au

### **Western Australia**

# **Industrial Air**

Unit 17, 16 Sustainable Ave, Bibra Lake WA 6163

Phone (08) 9418 2448
Email paul@industrialair.com.au
Website www.industrialairwa.com.au

### **North Queensland**

# **Capricorn Air Conditioning**

13 Mackley St, Garbutt QLD 4814 **Phone** (07) 4775 5222 **Email** sam2@capaircon.com.au

### Tasmania

## **Major Air - Launceston**

76 York St, Launceston TAS 7250 Phone (03) 6344 6888 Website www.majorair.com.au

### Major Air - Hobart

Unit 2, 10 Lampton Ave, Derwent Park TAS 7009 **Phone** (03) 6273 6455 **Website** www.majorair.com.au

# **Air Change South East Asia**

## Malaysia

No 61, Jalan i-Park 1/1 Perindustrian i-Park 81000 Bandar Indahpura, Johor **Phone** (+60) 7662 6299

# **New Zealand Distributors**

# Cooke Industries

31 Station Rd, Penrose, Auckland 1061 **Phone** +64 (0)9 579 2185 **Email** sales@cookeindustries.co.nz **Website** www.cookeindustries.co.nz

# **South East Asian Distributors**

## Thailand

# Synergine (Thailand) Co.Ltd

18/6 Sukhumvit 22 Sukhumvit Rd, Khlong Toey Bangkok 10110 **Phone** (+66) 851487312 **Email** w.manprasit@synergine.com.hk

# Indonesia

## **PT Smart Chiller Systems**

CEO Suites, One Pacific Place Tower 15th Floor, Jl. Jen. Sudirman Kav. 52-53 12190 Jakarta

Email mp@smardt-indonesia.com Phone (+62) 21 2550 2413

## Singapore

# Energy Supplies & Engineering (S) Pte Ltd

61 Bukit Batok Crescent, #03-07B Heng Loong Building, Singapore 658078

Contact 1- Desmond Tan Email desmond@esengrg.com Phone (+65) 9736 9956

Contact 2- Andrew Nah Email andrew@esengrg.com Phone (+65) 9771 8186



For more than 20 years, Air Change has provided unique equipment and engineering solutions for local and international clients using our internationally patented heat and energy recovery technology. During that time, we have developed a comprehensive range of energy efficient products to deliver controlled indoor climate conditions satisfying the requirements of all project stakeholders: the developer, the design engineer, and the building's owner and occupants.

### www.airchange.com.au

© Air Change Australia Pty Ltd 2021 202012RTU

